

State of California
AIR RESOURCES BOARD

EXECUTIVE ORDER G-70-199-AI

Relating to Certification of Gasoline Dispensing Nozzles to the
Liquid Retention Standard of 350 milliliters per 1,000 Gallons Dispensed

WHEREAS, the California Air Resources Board ("CARB") has established, pursuant to California Health and Safety Code sections 39600, 39601 and 41954, certification procedures for systems designed for the control of gasoline vapor emissions during motor vehicle fueling operations in its **CP-201 Certification Procedure for Vapor Recovery Systems of Dispensing Facilities (Certification Procedure)** as last amended July 25, 2001, incorporated by reference into Title 17, California Code of Regulations, section 94011;

WHEREAS, CARB has established, pursuant to California Health and Safety Code sections 39600, 39601 and 41954, test procedures for determining the compliance of vapor recovery systems with emission standards;

WHEREAS, pursuant to California Health and Safety Code section 39600 and 41954, CARB may issue and modify executive orders for the certification of vapor recovery systems;

WHEREAS, on January 23, 2002, CARB issued Executive Order G-70-199-AH: Certification of Gasoline Dispensing Nozzles to the Liquid Retention Standard of 350 Milliliters per 1,000 Gallons Dispensed;

WHEREAS, CARB has subsequently evaluated the Emco Wheaton A4500 nozzle for liquid retention;

WHEREAS, the nozzles listed in Exhibits 1 and 3 have been tested in accordance with **TP-201.2E Gasoline Liquid Retention in Nozzles and Hoses**;

WHEREAS, G-01-032 delegates to the Chief of the Monitoring and Laboratory Division the authority to update Executive Order G-70-199 which lists nozzles meeting the liquid retention standard of 350 milliliter per 1,000 gallons dispensed;

WHEREAS, I William V. Loscutoff, Chief of the Monitoring and Laboratory Division, find that the listed nozzles, with the exception of those listed in Exhibit 3, conform with the applicable requirements set forth in the Certification Procedure and result in a vapor recovery system that is at least 95 percent effective for attendant and/or self-serve use at gasoline service stations when the nozzles are used as specified in Exhibits 1 and 2, and when used in conjunction with a CARB-certified Phase I and Phase II vapor recovery system.

NOW, THEREFORE, IT IS HEREBY ORDERED that the nozzles listed in Exhibit 1 are certified to meet the July 1, 2001, liquid retention standard of 350 milliliters, or less, per 1,000 gallons dispensed.

IT IS FURTHER ORDERED that the continued use of installed systems as permitted by Health and Safety Code section 41956.1 shall meet the requirements of CP-201, section 19. Nozzles listed in Exhibit 2 shall be allowed as replacement nozzles in gasoline dispensing facilities installed prior to July 1, 2001, in accordance with this section.

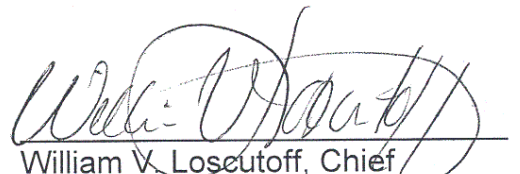
IT IS FURTHER ORDERED that a nozzle specified in an executive order listed in Exhibit 3 shall not be sold, offered for sale, or installed in any new or existing gasoline dispensing facility after July 1, 2001.

IT IS FURTHER ORDERED that any alteration of the equipment, parts, design, or operation of the systems certified hereby is prohibited, and is not compliant with this certification, unless such alteration has been approved by the Executive Officer or his/her designee.

IT IS FURTHER ORDERED that this Executive Order is valid through June 30, 2005, except as otherwise provided in Health and Safety Code sections 41954 and 41956.1 and the Certification Procedure, or until superceded by a modified executive order.

IT IS FUTHER ORDERED that the Liquid Retention Executive Order, G-70-199-AH, issued on January 23, 2002, is hereby superseded by this Executive Order.

Executed at Sacramento, California, this 10th day of August 2002.


William V. Loseutoff, Chief
Monitoring and Laboratory Division

Attachments:

- Exhibit 1 Systems and Nozzles Allowed for New Installations
- Exhibit 2 Nozzles Allowed as Replacements
- Exhibit 3 Nozzles Not Allowed for Installation in New or Existing Facilities

Executive Order G-70-199-AI
Exhibit 1
Systems and Nozzles Allowed for New Installations

The following table lists the nozzles that have met the liquid retention standard of 350 milliliters, or less, per 1,000 gallons dispensed. Nozzles listed below may be installed in new gasoline dispensing facilities.

All nozzles (even those not listed in Exhibit 2) may be repaired using certified parts, unless the nozzle is listed in Exhibit 3. Repair parts include non-internal parts such as spouts, bellows and hold open latches.

Executive Order	System	Allowed nozzle
G-70-7	Hasstech VCP-2 and VCP-2A	Emco Wheaton A4500 OPW 11VAI-37
G-70-33	Hirt	Emco Wheaton A4005 Emco Wheaton A4007 Emco Wheaton A4015 EZ-Flo 11VF EZ-Flo 5005 EZ-Flo 5007 EZ-Flo 5015 Husky V(5) OPW 11VF-47
G-70-52	Balance	Emco Wheaton A4005 Emco Wheaton A4007 Emco Wheaton A4015 EZ-Flo 11VF EZ-Flo 5005 EZ-Flo 5007 EZ-Flo 5015 Husky V(5) OPW 11VF-47
G-70-150	Marconi (Gilbarco)	Catlow ICVN Emco Wheaton A4505 Husky V34 6250 OPW 12VW Richards Astrovac
G-70-153	Dresser Wayne	Catlow ICVN Emco Wheaton A4505 Husky V34 6250 OPW 11VAI-xx xx = 64,69,84,89 OPW 12VW Richards Astrovac

Exhibit 1 (Continued)

Executive Order	System	Allowed nozzle
G-70-154	Tokheim	Catlow ICVN Emco Wheaton A4505 Husky V34 6250 OPW 11VAI-xx xx = 63,68,83,88 Richards Astrovac
G-70-163	OPW VaporEZ	OPW 11VAI-xx xx = 63, 68, 83, 88
G-70-164	Hasstech VCP-3A	Emco Wheaton A4500 OPW 11VAI-37
G-70-169	Franklin Electric	Husky V34 6250 OPW 11VAI-xx xx = 63,68,83,88
G-70-177	Hirt VCS400-7	OPW 11VA-29
G-70-179	Catlow ICVN-VI	Catlow ICVN Richards Astrovac
G-70-188	Catlow ICVN/Gilbarco VaporVac	Catlow ICVN
G-70-191	Healy 600 ORVR/800	Healy 800
G-70-196	SaberVac	Husky 6051

Executive Order G-70-199-AI
Exhibit 2
Nozzles Allowed as Replacements

The following table lists the nozzles which have either met the liquid retention standard of 350 milliliters, or less, per 1,000 gallons dispensed, or are allowed to be used because no other nozzle certified with the system has yet met the standard. Only nozzles listed in this table may be offered for sale, sold, or installed in any gasoline dispensing facility after July 1, 2001.

All nozzles (even those not listed in Exhibit 2) may be repaired using certified parts, unless the nozzle is listed in Exhibit 3. Repair parts include non-internal parts such as spouts, bellows and hold open latches.

Executive Order	System	Allowed nozzle
G-70-7	Hasstech VCP-2 and VCP-2A	Emco Wheaton A4500 OPW 11VAI-37
G-70-33	Hirt	Emco Wheaton A4005 Emco Wheaton A4007 Emco Wheaton A4015 EZ-Flo 11VF EZ-Flo 5005 EZ-Flo 5007 EZ-Flo 5015 Husky V(5) OPW 11VF-47
G-70-52	Balance	Emco Wheaton A4005 Emco Wheaton A4007 Emco Wheaton A4015 EZ-Flo 11VF EZ-Flo 5005 EZ-Flo 5007 EZ-Flo 5015 Husky V(5) OPW 11VF-47
G-70-118	Amoco	OPW 11V-J51 OPW 11V-J61 OPW 11-VAA Husky Model V-1

Exhibit 2 (Continued)

Executive Order	System	Allowed nozzle
G-70-150	Marconi (Gilbarco)	Lower A/L range - .90 to 1.10 Catlow ICVN Emco Wheaton A4505 Husky V34 6250 OPW 12VW Richards Astrovac
		Higher A/L range - 1.00 to 1.20 Emco Wheaton A4500 Husky V3 OPW 11VAI-27
G-70-153	Dresser Wayne	Catlow ICVN Emco Wheaton A4505 Husky V34 6250 OPW 11VAI-xx xx = 64,69,84,89 OPW 12VW Richards Astrovac
G-70-154	Tokheim	Catlow ICVN Emco Wheaton A4505 Husky V34 6250 OPW 11VAI-xx xx = 63,68,83,88 Richards Astrovac
G-70-163	OPW VaporEZ	OPW 11VAI-xx xx = 63, 68, 83, 88
G-70-164	Hasstech VCP-3A	Emco Wheaton A4500 OPW 11VAI-37
G-70-165	Healy 600	Healy 600
G-70-169	Franklin Electric	Husky V34 6250 OPW 11VAI-xx xx = 63,68,83,88
G-70-177	Hirt VCS400-7	OPW 11VA-29
G-70-179	Catlow ICVN-VI	Catlow ICVN Richards Astrovac
G-70-183	Healy Franklin	Healy 600
G-70-186	Healy 400 ORVR	Healy 400 ORVR

Exhibit 2 (Continued)

Executive Order	System	Allowed nozzle
G-70-188	Catlow ICVN/Gilbarco VaporVac	Catlow ICVN
G-70-191	Healy 600 ORVR/800	Healy 800
G-70-196	SaberVac	Husky 6051

Executive Order G-70-199-AI

Exhibit 3

Nozzles Not Allowed for Installation in New or Existing Facilities

The following table lists the nozzles that have been tested and have failed to meet the liquid retention standard of 350 milliliters, or less, per 1,000 gallons dispensed. Once a nozzle is replaced, it must be replaced with a nozzle from Exhibit 1 or 2.

Nozzles listed in this Exhibit shall not be repaired.

Nozzles Disallowed	Affected Executive Orders
None currently listed	